



CS 210/RS 210 Series Interconnected Lock

Introducing the Schlage Interconnected lock.

The new Schlage CS and RS 210 Interconnected Locks combine exclusive options with increased strength, for both residential and commercial applications. The Schlage CS and RS 210 feature single motion egress to meet Life and Safety code requirements, as well as adjustability from the standard 4" to 5-1/2" door preps. Robust performance exceeds BHMA grade 2 requirements, giving the CS and RS 210 the combination of aesthetics, versatility and strength.

Features and Benefits

Reliable:

- Meets all ANSI/BHMA A156.25 Grade 2 requirements
- 3 hr. UL fire rating

Field Configurable:

- Works with door prep of 4" or 5-1/2"

Adaptable:

- 15 Levers styles
- 2 Escutcheon styles
- 6 Finishes

Flexible:


- FE210: Electronic Deadbolt
- RS210: B60 Trim
- CS210: B500 Trim
 - ↳ SFIC and FSIC



Lever Styles



Escutcheon Styles

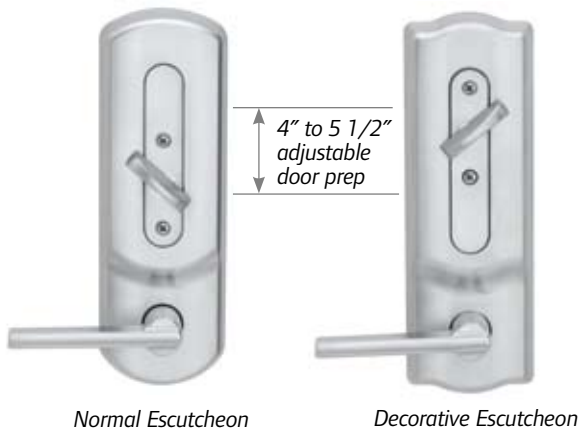

Specifications

- ANSI/BHMA Grade 2 certified
- **UL Rating** – UL 3hr. rating is standard
- **Latch** – UL latch comes with 1" x 2-1/4" square and round corner faceplate (square corner standard, round corner included in package). 1" edge bore required.
- **Strikes** – 1-1/8" x 2-3/4" square corner deadbolt strikes and 2-1/4" x 1-5/8" square corner full lip latch strike reinforcer. Dust box not included.
- **Backset** – Adjustable backset, fits 2-3/8" or 2-3/4" backsets
- **Levers** – All lever trim is non-handed and field reversible
- **Stile width** – Minimum 4-1/2" for 2-3/8" backset, minimum 5" stile for 2-3/4". To ensure proper fit, use the dimensions below
- **Return to Door** – Saturn (SAT) and Neptune (NEP) levers are return to door code compliant
- **Cylinder** –

FE & RS Series

Standard: 6 pin solid brass, keyed 5-pin

CS Series

Standard: 6 pin solid brass, keyed 5-pin, C123 keyway

Optional: FSIC (full size interchangeable core), SFIC (small format interchangeable core)

- **Keys** – (2) Silver nickel keys included
- **Door Range** – 1-3/8" to 1-3/4" standard. 1-3/4" to 2" optional. Must be specified
- **Center to Center** – Fits 4" or 5-1/2" center to center door preps.
- ***Credential** – Deadbolt is operated using iButton credential (sold separately)

*Note: Only available on the FE200.

Deadbolt Choices

- 3 styles - (2) for mechanical security (1) for electronic

Mechanical



CS200

RS200

Electronic



FE200

Cylinder Choices – available for CS 200 Series only

- 3 options - standard, full size or small format interchangeable core



Full Size Interchangeable Core



Small Format Interchangeable Core

Finishes



605
Bright Brass

609
Antique Brass

619
Satin Nickel

625
Bright Chrome

626
Satin Chrome

716/643e
Aged Bronze

